

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 6 TOWNSHIP 16 RANGE 3


DATE: 5-23-02

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Survey marker nail set

METHOD OF ESTABLISHMENT: County:
New location

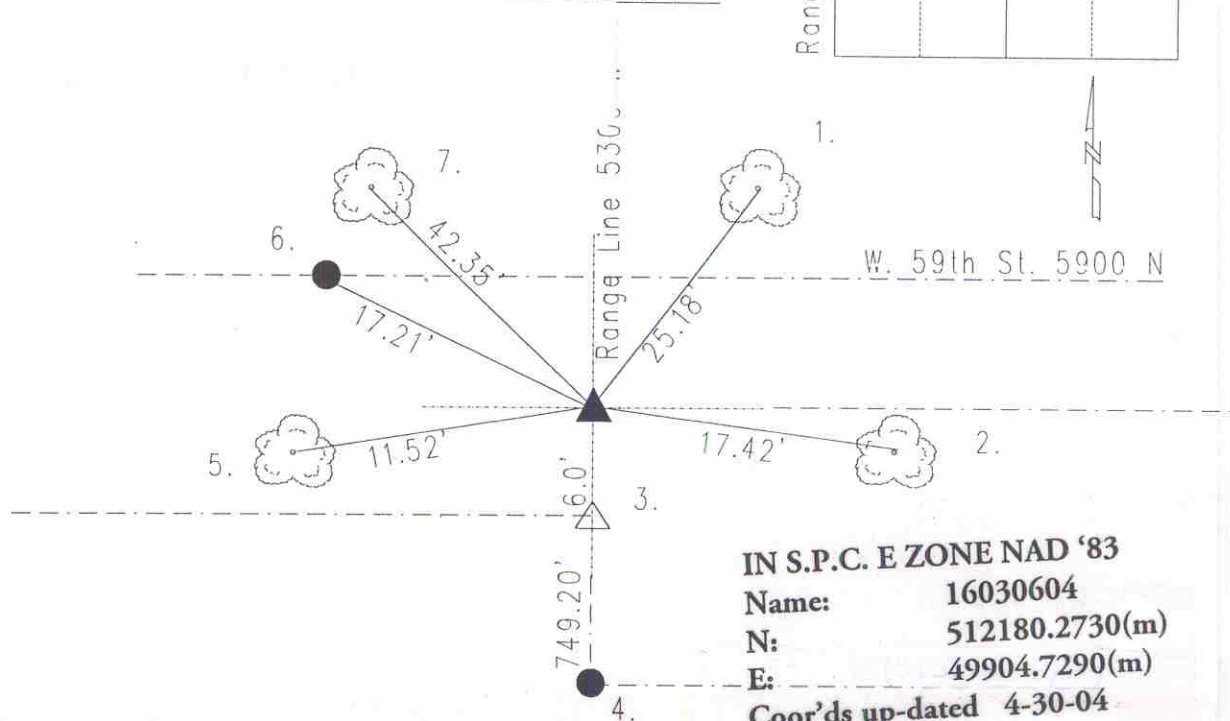

IN S.P.C. E ZONE NAD '83
Name: 16030604
N: 512180.2730(m)
E: 49904.7290(m)
Coord's up-dated 4-30-04

Corner History: Corner was originally positioned by Wm. B. Laughlin in 1820. The Marion County Atlas pg. 6 notes the WQ of Section 6 is 40 chains north of the southwest corner of Section 6, and is 37.41 chains south of the northwest of Section 6 (common corner with the northeast of Section 1-16-2).

References dated June 6, 1978 report the corner to have been found per deed records and is a common corner with the EQ corner of Sec. 1-16-2. An iron pin was recorded as the monument.

On November 3, 1995 in conjunction with the 59th Street bridge project the corner was excavated and a 30" long number 5 re-bar was replaced with a 205 Harrison monument. In the Spring of 2002, David Holley, L.S. of Kimbley-Proctor called this office to seek verification of the EQ Section 1-16-2 and the WQ Section 6-16-3. He pointed out the original survey notes did not indicate a single common corner had been established but two separate corners had been set. A search of records on file and survey notes recently acquired from George Schmidt via I.S.P.L.S. found a survey dated April 1908 apparently by H. W. Klausman. This Klausman survey notes the following: a) the W Q of 6-16-3 is 6 feet north of the EQ of 1-16-2. b) the WQ is 675.5 feet east and 6 feet north of a point a 59th Street and Moller Road. c) is 749.20 feet north of a property corner on the Range Line. d) is 1842.20 feet west of the center of Section 6-16-3. The points at 59th Street and Moller Road and the center of 6-16-3 are points long perpetuated by Section Corner References, whereas the WQ of 6-16-3 is dated 1978. Furthermore a planted conical stone was recovered in an old fence line 749.20 feet south of 59th Street per the Klausman survey. On May 15, 2002 a City of Indianapolis Department of public Works backhoe was used to dig a trench perpendicular to 59th Street. The trench was approximately 8 feet long 4 feet wide and 5 feet deep. No stone or other monuments were recovered. On May 23, 2002 a Survey Marker nail was set for the WQ of Section 6-16-3. The nail set is approximately 17.2 feet southeasterly from the Harrison marker previously set.

REF.	DISTANCE	DESCRIPTION
1.	25.18'	Mag nail w/brass washer SE 10" oak 40"up
2.	17.42'	Railroad spike N 20" hackberry 10"up
3.	6.0'	Due S to E Q 1-16-2 (MCSO capped rebar set)
4.	749.20'	Stone found in old fence line
5.	11.52'	Mag nail w/brass washer E 12" ash 6"up
6.	17.21'	Harrison monument (centerline of 59th Street)
7.	42.35'	Mag nail w/brass washer SW 8" locust 40"up